

# RIVA

---

We truly appreciate that you have chosen the RIVA S for your listening experience. Many days and months have gone into designing this product in the hope that you will have as much pleasure listening to it as we had creating it!

## **The RIVA Team**

Fountain Valley, California

# CONTENTS

## REGISTER YOUR RIVA

Warranty Coverage Registration ..... 2

## GETTING STARTED

Power On/Off..... 4

## CONNECTION

Connect Your Devices..... 5

## RIVA Audio

Mobile App ..... 6

## TRILLIUM™ SURROUND

Movie & Gaming ..... 8

## CALL ME

Speakerphone ..... 9

## CHARGE OUT

Charge Your Phone/Tablet..... 10

## DIVIDE & CONQUER

TrueWireless™ ..... 11

## GET THIS PARTY STARTED

Party/Multi-User Mode ..... 12

## VINYL JUNKIES WANTED

Phono Mode ..... 13

## RIVA S SHORTCUTS

Button Controls..... 14-15

## MAXIMIZE YOUR PLACEMENT

For Immersive Sound ..... 17

## TAKE CONTROL

Controls ..... 18-19

## HOOK UPS

Inputs ..... 20-21

## THE MINERALS

Tech Specs & What's Included..... 22

## RIVA S TIPS

Usage & Care Tips..... 23

## Q & A

Troubleshooting..... 25-26

## ADDITIONAL SUPPORT

Online Resources/Reference ..... 27

## COMPLIANCE

EU Countries..... 29

FCC and IC (USA & Canada Only)..... 30

## PLAY SAFE

Safety Guidelines..... 31

## LEGAL

Disclaimers..... 32

Register your RIVA S for warranty coverage and to receive VIP access  
to RIVA Nation!

Register online at:



**[www.rivaaudio.com/registration](http://www.rivaaudio.com/registration)**

Be sure to have your RIVA S serial number, located on the bottom of the RIVA S unit or  
on the side of the unit's box.

**START ME UP!**

[rivaudio.com/support](http://rivaudio.com/support)


## GETTING STARTED: Power On / Off

1. RIVA S is partially charged out of the box. Plug in immediately with the power adapter to charge to 100%. The Battery icon LED will appear steady and a voice prompt will announce when the battery is fully charged.
2. Power On: Tap the  to turn ON.
3. Power Off: Hold the  to turn OFF.

### When on the GO


1. On the back of the RIVA S, slide the BATT ON/OFF switch to ON to engage the battery.

NOTE: We recommend you play RIVA S for 3 hours at 50% volume to “break in” the speakers for maximum acoustic performance.

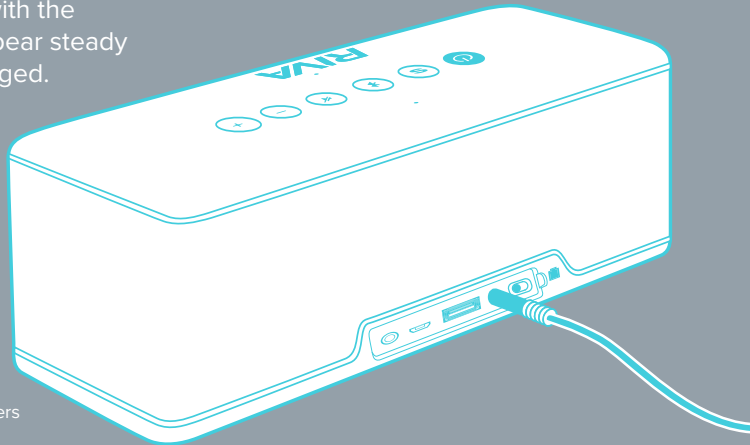


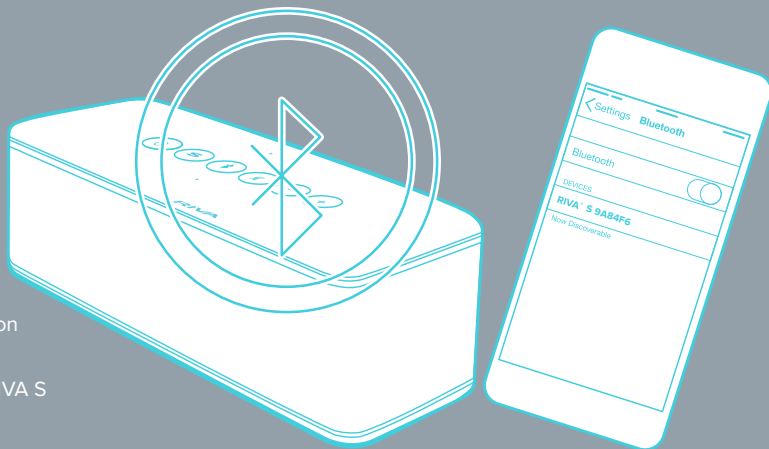
## CONNECTION: Connect Your Devices

### • Bluetooth® Device


- When you first turn your RIVA S on, it will automatically go into discovery/pairing mode to connect to a Bluetooth® device.
- The unit will appear on your device as RIVA S along with a unique MAC address. Once paired, you can begin playing.
- To pair a new device, hold down the  to discover your device. The Bluetooth® icon will pulse blue when pairing and stay solid once paired.

### • Non-Bluetooth® Device

- Using the included 3.5 mm or red/white RCA cables, connect the output on your non-Bluetooth® device to the Aux input on the RIVA S.
- Bluetooth® takes priority, so please pause your Bluetooth® source. The RIVA S will automatically switch to the Aux input and the  will turn green.



NOTE: Please see the Play Safe page for additional safety guidelines.

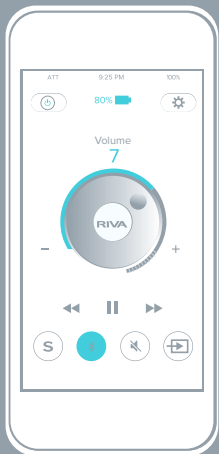

Download the free **RIVA AUDIO** app from the **App Store**<sup>SM</sup> or **Google Play**.<sup>TM</sup>

- Control all of the features on your RIVA S directly from your phone or tablet for iOS or Android<sup>TM</sup>!
  - Control volume up, down and mute.
  - Control Trillium<sup>TM</sup> Surround mode.
  - Monitor battery life.
  - Change app background color.
  - Manage audio prompts – Voice, tones and silent modes available.
  - Power On/Off your RIVA S
  - Select app and speaker language
- RIVA is constantly developing software with the latest technologies to improve your experience. Visit [rivaaudio.com/support](http://rivaaudio.com/support) for the latest information.




**PLAY ME!**


[rivaaudio.com/support](http://rivaaudio.com/support)

## TRILLIUM® SURROUND: Movie & Gaming Surround Sound

Trillium™ Surround enhances your audio visual experience while playing movies or video games through your RIVA S.

Tap the  button to activate. The Surround icon will remain lit when Surround is active.


Tap the  button to turn off Surround.

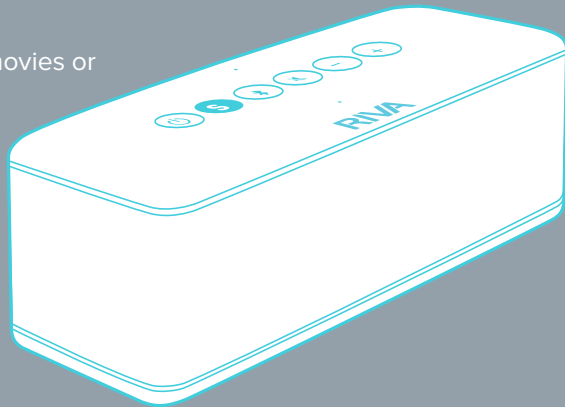


### • Outbound Call:

- Make sure your device is paired with the RIVA S via Bluetooth®.
- Place the call using your device and make sure RIVA S is selected as the audio output.

### • Incoming Call:

- When connected to your RIVA S via Bluetooth®, incoming calls will ring through your RIVA S.
- Accept the call by tapping the  or directly from your device. Make sure RIVA S is selected as the audio output.

### • Decline/End Call:


- To decline or end a call, tap the  or directly from your device.
- RIVA S will return to the settings used prior to the call.

### • For Best Clarity:

- Speak directly toward the RIVA S speaker.
- Do not obstruct or cover the microphone openings.

## CHARGE OUT: Charge your Phone / Tablet


- Charge your phone or tablet by connecting your device's USB cable into the Charge Out port on the RIVA S.
- Make sure slide the BATT ON/OFF switch to the ON position.
- RIVA S can charge your device when it has over 30% battery power. The Battery icon LED will be green or orange.

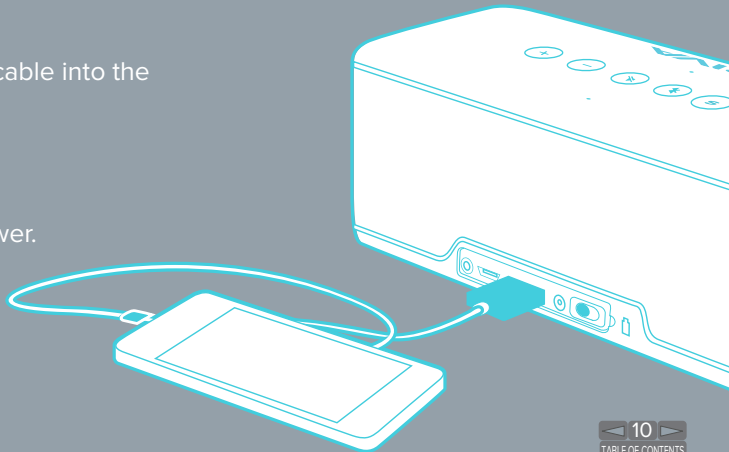


## DIVIDE & CONQUER: TrueWireless™

Connect two RIVA S speakers wirelessly to create left and right channel stereo.



To activate TrueWireless™: On the Master speaker press and hold the **S** and **-** buttons until it says TrueWireless™. On the secondary speaker, press and hold the **S** and **+** buttons until it says TrueWireless™. Once the secondary speaker is paired, both speakers will announce TrueWireless™ is paired. To disconnect TrueWireless™, press and hold the **S** and **⌘** buttons at the same time on the Master speaker.

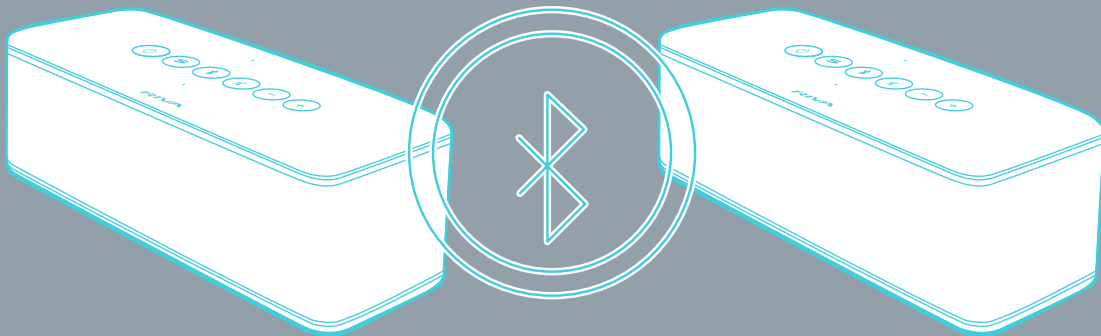

## GET THIS PARTY STARTED: Party/Multi-User Mode

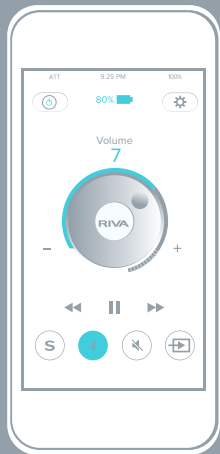


Pair two Bluetooth® devices to one RIVA S for multi-user control.

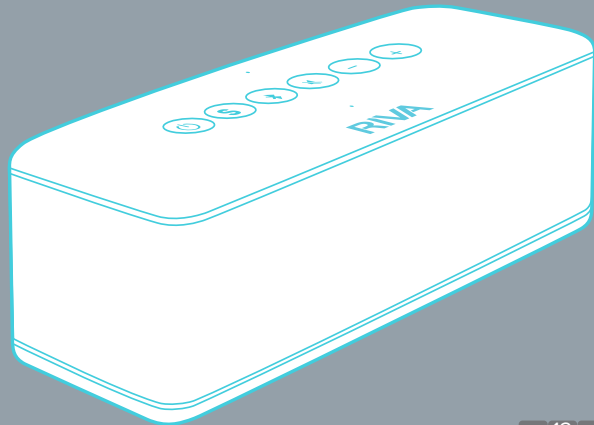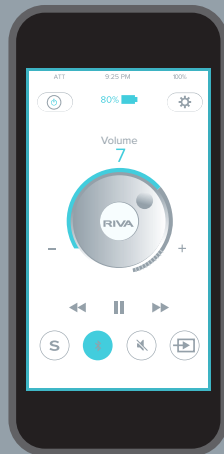







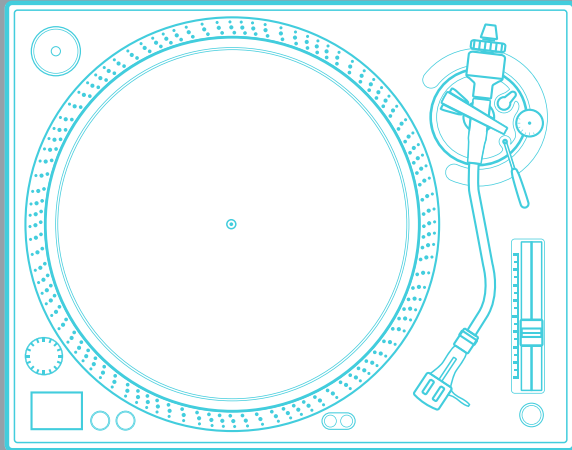





## VINYL JUNKIES WANTED: Phono Mode

Adds up to 9dB of gain to the speaker's output to account for the inherently weaker signal coming from a turntable with built-in phono preamp or traditional turntable with external phono preamp. This mode also bypasses the automatic gain control in the DSP for the auxiliary input, providing a clean, uncompressed signal to the amplifier. No other Bluetooth speaker has the capability to play vinyl like this!

To use with turntable with low audio output, plug in aux cable and hold down **+** and **-** for 3 seconds. Bluetooth light will turn orange.














# RIVA S SHORTCUTS... Vinyl Junkies Included

FEATURE	BUTTONS	NOTES
<b>Key Lock</b>	 and 	Hold down for 3 seconds to lock all keys. Bluetooth® icon will turn RED while engaged. Repeat to unlock.
<b>Speakerphone: Accept Call</b>		Speakerphone mode: Tap to accept an incoming call.
<b>Speakerphone: Reject/Hang Up</b>		Speakerphone mode: Tap to reject an incoming call or hang up an active call.
<b>Phono Mode</b>	 and 	To use with turntable with low audio output, plug in aux cable and hold down for 5 seconds. Bluetooth® icon light will turn orange.
<b>TrueWireless™</b>	 and 	On 1st RIVA S speaker, press and hold down for 5 seconds. Prompt will announce “TrueWireless”.
	 and 	Then on 2nd RIVA S speaker, press and hold down for 5 seconds. Prompt will announce “TrueWireless”, then “TrueWireless is paired” on both speakers.
	 and 	To disconnect TrueWireless™, press and hold the surround and mute buttons at the same time on the Master speaker.



# RIVA S SHORTCUTS... Vinyl Junkies Included

FEATURE	BUTTONS	NOTES
<b>Party Mode: Multi-User Control</b>	 and 	Hold down for 3 seconds. Prompt will announce “pairing”, 2nd device can now pair to speaker. Prompt will announce “paired” when connected. To disconnect, 2nd device needs to “Forget Device”.
<b>Change Audio Prompts</b>	 and 	Hold down together for 2 seconds to cycle through the audio prompt modes. You’ll hear a quick double beep when prompt mode has changed. Hold continuously to cycle through all audio prompt modes.
<b>Factory Reset</b>	 +  + 	Hold down together for 10-15 seconds to erase device memory and restore factory settings.
<b>Playlist Control: Only available with Bluetooth® Input</b>	 and 	Skip to next track.
	 and 	Go back to previous track.


# SOUND MACHINE

[rivaaudio.com/support](http://rivaaudio.com/support)

## MAXIMIZE YOUR PLACEMENT: For Immersive Sound

Trillium™ is our proprietary audio technology that delivers truly immersive sound with rich and powerful bass to fill your room with music.

Take your RIVA S anywhere for great sound! To get the most out of your RIVA indoors, place the speaker about 3-6 inches (8-15 cm) from a wall or corner to take advantage of the natural acoustics of the room. (see diagram)

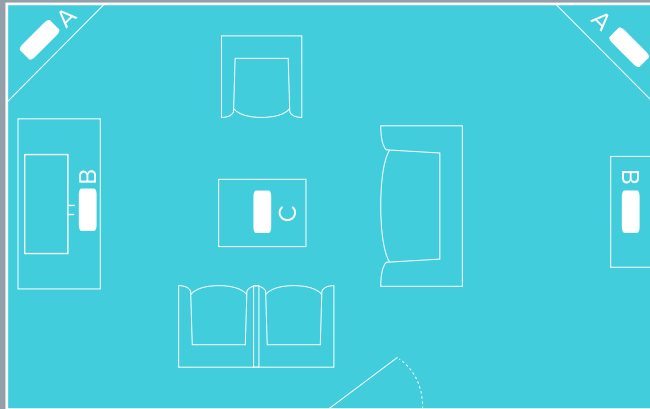

- A: Best**  
In any corner
- B: Really Good**  
Solid, reflective surface behind RIVA
- C: Good**  
Open area/outdoors



## Power On/Off

Power On: Tap the Power button.  
Power Off: Tap the Power button.



## Trillium™ Surround

Surround On: Tap the surround button. The Surround icon will remain blue while in Surround mode.

Surround Off: Tap the Surround button again to turn off.




## Input

Press and hold the Input button to enter Bluetooth® pairing mode. To switch to AUX, plug in a device and pause all audio on your Bluetooth device. The light will change depending on the connection:

Bluetooth® Input: Solid Blue

Auxiliary 3.5 mm Input: Flashing Green

NOTE: Solid Green is when connected to a Bluetooth® device

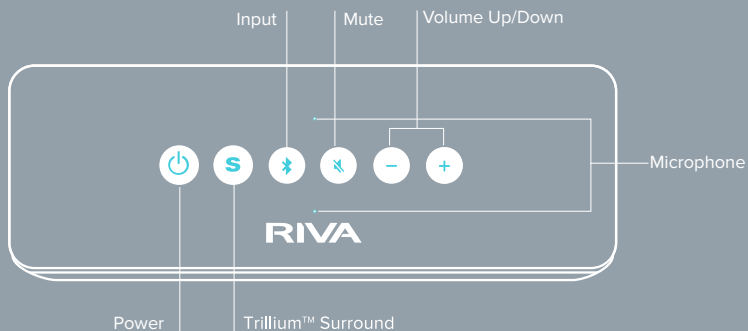



### Mute

Tap to mute. The Mute icon light will remain blue while muted. Tap again to unmute.



### Volume Down/Up

Control the volume - or +


NOTE: Volume level will affect your battery playing time. Please see The Minerals section of this guide for more details.

### Microphone for Teleconferencing

Pair your phone or other Bluetooth® device to the RIVA S to enjoy crystal clear teleconferencing with noise and echo canceling microphone.

NOTE: Do not cover or stick anything in the microphone opening (toothpicks, q-tips, spaghetti sauce, etc.) Doing so will void your warranty.

## HOOK UPS: Inputs

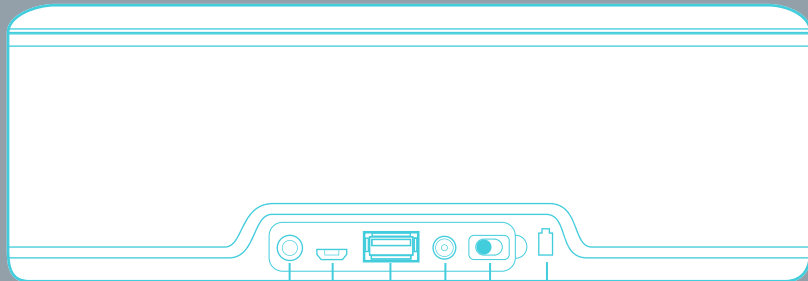

AUXILIARY

USB DATA

CHARGE OUT

19V DC

BATTERY  
ON/OFF

BATTERY LEVEL INDICATOR

Use the I/O cover, located on the bottom of your RIVA S to help resist dust and splashes.

**I/O COVER**

NOTE: Do not cover or stick anything into the input openings (paper clips, nails, gum, etc.) except the I/O Cover or appropriate plugs. Doing so will void your warranty.



## Auxiliary 3.5 Input

A 3.5 mm cable is included to connect your non-Bluetooth® audio devices.

NOTE: Allowable input voltage range is 200mV to 2Vrms.



## USB Data Input

This input is used for software upgrades and future updates. Also supports USB audio playback from a computer.



## Battery ON/OFF

Control battery power functions. Switch OFF to conserve battery, especially when you will be separated from your RIVA S for an extended period of time. When OFF, all functions will be disabled.



## CHARGE OUT

Plug in your phone or tablet using a compatible cord to charge from the RIVA S's powerful battery. The BATT ON/OFF button must be ON.



## 19V DC Power Adaptor Input

Use the provided external power supply to charge the RIVA S. Use of any other non-approved power adapter may damage the electronics and will void the warranty.



## Battery Icon

Green: 60 – 100% charge remaining  
Orange: 30 – 60% charge remaining  
Red: 0 – 30% charge remaining

Battery icon will pulse while being charged.

# THE MINERALS: Technical Specifications & What's Included

## Tech Specs:

- |                   |  |                                 |  |
|-------------------|--|---------------------------------|--|
| • Battery Life* : | 13 hours in at 70dB volume                                   | • AC Adapter                    | 19V DC, 2.5A   |
| • Dimensions:     | 7.48 in (190 mm) L<br>2.64 in (67 mm) W<br>2.68 in (68mm ) H | • Power Adapter<br>Input Rating | 100-240 VAC<br>50-60Hz   |
| • Weight:         | 1.5 lbs. (0.7 kg)  | • Audio Codecs<br>Supported     | SBC, AAC, aptX®  |
|                   |  | • IPX4<br>Water Resistance      | Protection from the<br>splashing of water<br>from any direction. |

## In The Box

- External Power Supply
- 40" 3.5 mm to RCA Connector
- 40" 3.5 mm to 3.5 mm Connector
- Splash-Resistant I/O Cover
- User Guide

Features, specifications, and appearance are subject to change without notice.

\*These hours are approximate based on averages as tested in our laboratory.



## Usage Tips:



### Picking Up RIVA While Playing

- We recommend picking up the RIVA S in the center to avoid accidentally tapping the Power button. (Visit [rivaaudio.com/support](http://rivaaudio.com/support) for additional information.)

### Capacitive Touch

- Since the RIVA S' buttons are capacitive touch, a gentle tap will suffice.

### Volume

- If you hold down the  or  , the volume will go multiple steps in the direction of the button you are holding.
- Some audio recordings are louder or quieter than others. Adjust the volume level accordingly.

## Care:

- We recommend that you unplug and turn OFF the BATTERY ON/OFF button before cleaning your RIVA S.
- Do not clean your RIVA while it is charging because doing so could result in electric shock.
- Clean your RIVA S with a soft, dry cloth, preferably microfiber. Do not use steel wool, grill brushes, or other abrasive cleaners.
- If your RIVA S isn't feeling its best, contact us at [support@rivaaudio.com](mailto:support@rivaaudio.com) Remember, you have a warranty, and we know how to make them feel better.

**HELP ME, RIVA!**

[rivaaudio.com/support](http://rivaaudio.com/support)

### Q: Why is there no power to the RIVA S?

- Check to see if you AC adapter is plugged in and the BATT ON/OFF button is in the ON position.
- Make sure the Battery icon LED is not red, indicating the RIVA has less than 30% battery power left.

### Q: I plugged in my phone/tablet to charge through my RIVA S, but it's not charging.

- Check to see if the BATT ON/OFF button is in the ON position.
- Make sure the Battery icon LED is not red. RIVA S will only charge if it has more than 30% of battery remaining. A red Battery icon LED means the RIVA has less than 30% of battery power left.




### Q: I wave my hand over the RIVA S and nothing happens.

- Check to see if the BATT ON/OFF button is in the ON position.
- Check to see if the battery is charged, and if not, plug into the wall with the provided power supply.
- Proximity sensing works between 1 to 2 inches (25 – 50 mm) from the top cover of RIVA S.

### Q: How do I play from a non-Bluetooth® device?

- Connect your device using the Auxiliary 3.5 mm input and select the Auxiliary 3.5 mm input, indicated by the green light on the .







**Q: RIVA S is paired with my phone/tablet, but I can't hear anything.**

- Make sure the  is not pulsing. If pulsing, the RIVA S is in Bluetooth® pairing mode.
- Make sure the music is playing on the device.
- Make sure RIVA RIVA S is selected as the output device.
- Check to see if the  is solid blue. If solid blue, RIVA S is muted.
- Increase volume level.
- Make sure the Bluetooth® input is selected. The  will be solid blue. Green indicates the Auxiliary 3.5 mm input is selected.

**Q: I don't like the current voice prompts, what can I do?**

RIVA S has two audio prompt settings: voice and tones. To switch, go to the Settings page in the RIVA Audio app to make your selection. If you choose to disable the voice prompts, these will be replaced with tone prompts.

Have more questions, visit  
[rivaaudio.com/support](http://rivaaudio.com/support)

- **FAQ:**  
[rivaaudio.com/support](http://rivaaudio.com/support)
- **Register your RIVA S**  
[rivaaudio.com/registration](http://rivaaudio.com/registration)
- **Customer Support**  
1-844-GET-RIVA  
[rivaaudio.com/support](http://rivaaudio.com/support)
- **Technical Specifications**  
[rivaaudio.com/products/riva-s](http://rivaaudio.com/products/riva-s)
- **Privacy Policy**  
[rivaaudio.com/support](http://rivaaudio.com/support)
- **Warranty Information**  
[rivaaudio.com/support](http://rivaaudio.com/support)
- **Firmware Updates**  
Download the latest firmware updates for your RIVA S directly from [rivaaudio.com/support](http://rivaaudio.com/support).
- **Digital User Guide**  
This guide is available in a variety of languages at [rivaaudio.com/support](http://rivaaudio.com/support).
- **RIVA Audio App**  
Download the free RIVA Audio app from the App Store<sup>SM</sup> or Google Play<sup>TM</sup>.
- **Connect with RIVA!**
  -  [facebook.com/RIVANation](https://facebook.com/RIVANation)
  -  [@RIVAaudio](https://twitter.com/RIVAaudio)
  -  [pinterest.com/RIVANation](https://pinterest.com/RIVANation)
  -  [instagram.com/RIVANation](https://instagram.com/RIVANation)
  -  [RIVA Audio](https://apps.apple.com/RIVA-Audio)
  -  [You Tube](https://www.youtube.com/RIVA-Audio)

## COVERING OUR ASSETS

[rivaaudio.com/support](http://rivaaudio.com/support)

# COMPLIANCE: EU Countries

-  This product is compliant with the CE directive. All returns must be made to the original place of purchase.

- **WEEE Notice**

The Directive of Waste Electrical and Electronic Equipment (WEEE), which entered into force as European Law on 13th February 2003, resulted in a major change in the treatment of electrical equipment at end-of-life.

The purpose of the directive is, as a first priority, the prevention of WEEE, and in addition, to promote the reuse, recycling and other forms of recovery of such wastes as to reduce disposal.

The WEEE logo on the product or on its box indicating collection for electrical or electronic equipment consist of the crossed out wheel bin, as shown below.



This product must not be disposed of or dumped with your other household waste. You are liable to dispose of all your electronic and electrical waste equipment by relocating over to the specified collection point for recycling of such hazardous waste. Isolated collection and proper recovery of your electronic equipment at the time of disposal will allow us to help conserve natural resources.

Moreover, proper recycling of the electronic and electrical waste equipment will ensure safety of human health and environment. For more information about electronic and electrical waste equipment disposal, recovery, and collection points, please contact your local city center, household waste disposal service, shop from where you purchased the equipment, or the manufacturer of the equipment.

- **ROHS Compliance**

This product is in compliance with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 of the restriction of the use of certain hazardous substances in electrical and electronic equipment.

- **EU Batteries Directive 2006/66/EC**

A new battery directive 2006/66/EC on Battery and Accumulator replacing directive entered into force on the 26th September 2008. The directive applies to all types of batteries and accumulators (AA, AAA, button cells, lead acid, rechargeable packs) including those incorporated into appliances except for military, medical and power tool applications.

The directive sets out rules for collection, treatment, recycling and disposal of batteries, and aims to prohibit certain hazardous substances and to improve environmental performance of batteries and all operations in the supply chain.

- **Instructions for Users on Removal, Recycling and Disposal of Used Batteries**

For products with a built-in-battery that last for the lifetime of the product, removal may not be possible for the user. In this case, recycling or recovery centers handle the dismantling of the product and the removal of the battery. If, for any reason, it becomes necessary to replace such a battery, this procedure must be performed by authorized service centers.

In the European Union and other locations, it is illegal to dispose of any battery with household trash. All batteries must be disposed of in an environmentally sound manner.

Contact your local waste-management officials for information regarding environmentally sound collection, recycling and disposal of used batteries.

**WARNING:** Danger of explosion if battery is incorrectly replaced. To reduce risk of fire or burns, don't disassemble, crush, puncture, short external contacts, expose to temperature above 60°C (140°F), or dispose of in fire or water. Replace only with specified batteries. The symbol indicating "separate collection" for all batteries and accumulators shall be the crossed-out wheeled bin shown in the far left column.

- **For All Products with Wireless Operation**

Audio Design Experts, Inc. hereby declares that this equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC, ErP 2009/125/EC Directive and RoHS 2-11/65/EU Directive. The declaration of conformity may be viewed at [rivaaudio.com/support](http://rivaaudio.com/support).



This product qualifies for ENERGY STAR in the "factory default" setting, and this is the setting in which power savings will be achieved. Changing the factory default settings or enabling other features will increase power consumption that could exceed the limits necessary to qualify for ENERGY STAR rating. We want to help you save energy.

# COMPLIANCE: FCC and IC (USA & CANADA only)

## FCC Interference Communication

- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. The limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that the interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:
  - Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.

## FCC and IC Statements

- This device complies with the Pat 15 of the FCC Rules. Operation is subject to the following conditions:
  - This device may not cause harmful interference, and
  - This device must accept any interference received, including interference that may cause undesired operation.
  - The Class B digital apparatus complies with Canadian ICES-003.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

## FCC CAUTION

- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter. To locate FCC identification numbers, please look on the underside of the RIVA S unit.

## FCC and IC Radiation Exposure Information

- This equipment complies with FCC/IC RSS-102 radiation exposure limits set forth for an uncontrollable environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

## Disposal and Recycling Instructions

This product must be disposed of according to local laws and regulations once it comes to the end of its life.



# PLAY SAFE: Safety Guidelines



Your RIVA S is designed and manufactured to operate within defined design limits, and misuse may result in electrical shock or fire. To prevent your RIVA from being damaged, the following rules should be observed for the installation, use, and maintenance. Please read the following safety instructions before operating your RIVA.

## DO NOT:

- Use the RIVA S near water or pour water/other liquids on the unit.
- Submerge your RIVA S in any liquid.
- Install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Puncture, throw, kick/punt, shred, crush, step on, microwave, light on fire, or toss your RIVA S in the dishwasher.
- Insert foreign objects into your RIVA S.
- Leave or store the RIVA S or any of its accessories over or near your car's airbag. Serious injury may result if the airbag deploys.
- Place the RIVA S on high surfaces where the speakers may shift or fall off the edge.
- Leave a battery on prolonged charge when not in use.
- Charge the battery in damp places.
- Block ventilation openings.
- Allow the power cord to be walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Disassemble, paint or blanket in stickers.
- Drag sharp objects across any surface.
- Leave in the sun for extended periods. • Place in low or freezing temperatures.
- Use the included cords in the RIVA S packaging for any other purpose other than the intended one.
- Defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades a third grounded prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for the replacement of the obsolete outlet.
- Try to replace the RIVA S battery. Contact us at [rivaaudio.com/support](http://rivaaudio.com/support), and we will help you.

## Caution:

- Use only the manufactured supplied power supply and accessories with your RIVA S.
- Only charge your RIVA S according to the instructions provided by the RIVA Team in this and online manuals.
- Do not dispose of the RIVA S or its battery in a fire. Doing so could cause the battery to explode causing injury or death.
- Listening to music at high volume over extended period of time may damage your hearing. The maximum volume levels achievable with RIVA speakers may exceed safe levels for extended listening. RIVA accepts no liability for hearing loss, bodily injury or property damage as a result of use or misuse of this product.

## Care:

- Do not clean your RIVA S while it is charging because doing so could result in electric shock.
- Clean your RIVA S with a soft dry cloth, preferably microfiber. Do not use steel wool, grill brushes or other abrasive cleaners.
- If your RIVA S is under the weather, contact us at [rivaaudio.com/support](http://rivaaudio.com/support). Remember you have a warranty, [rivaaudio.com/support/warranty](http://rivaaudio.com/support/warranty), and we know how to make them feel better!

RIVA vouches that no entertainment or sports celebrities were used or exploited in laboratory testing during the development and creation of the RIVA RIVA S.

## LEGAL: Disclaimer

This RIVA S User Guide contains information that is subject to change without notice. For the most updated information or questions, visit [rivaaudio.com/support](http://rivaaudio.com/support) or e-mail [support@rivaaudio.com](mailto:support@rivaaudio.com).

©2014-2015 Audio Design Experts, Inc. All Rights Reserved. RIVA, Turbo Series by RIVA, ADX and Trillium are trademarks of Audio Design Experts, Inc., register in the US and other countries.

Member of the CSR plc group of companies. CSR plc registered in England and Wales, registered number 4187346, registered office Churchill House, Cambridge Business Park, Cowley Road, Cambridge, CB4 0WZ, United Kingdom. aptX™ and TrueWireless are trademarks of CSR plc or one of its group companies and may be registered in one or more jurisdictions.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Audio Design Experts, Inc. is under license.

iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

App Store is a service mark of Apple Inc.

Android and Google Play are trademarks of Google Inc.

All other company and product names mentioned may be trademarks or service marks of their respective owners. Mention of any third-party products is for informational purposes only and does not constitute an endorsement or recommendation. Audio Design Experts, Inc. assumes no responsibility for these products' performance or use of.

DESIGNED TO AMAZE

[www.rivaudio.com](http://www.rivaudio.com)